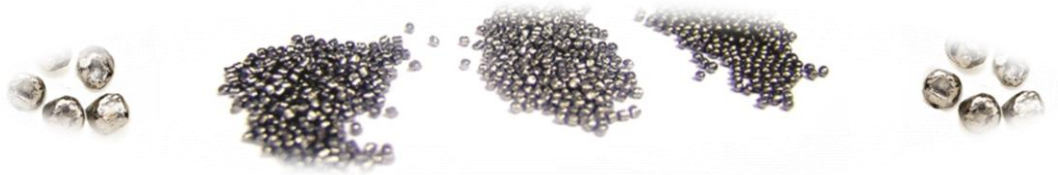

Production and sale cylindrical and rounded cut wire abrasives for blast cleaning, fetting, shot peening, cut wire abrasives production equipment

Conditioned cut wire pellets

Conditioned cut wire pellets are cut from steel wire. The respective length of the grain is equivalent to the diameter. By rounding the cylinder edges a conditioned grain is created, classified in the grain shapes G1 (condition cut wire), G2 (double conditioned cut wire) and G3 (almost spherical grain).

General purpose of Conditioned cut wire pellets are blast-hardening (shot peening).

TYPE OF ABRASIVES	CONDITIONED CUT WIRE PELLETS
Grain size (mm)	**Hardness**
0.2	**640 HV1** **670 HV1** **700 HV1**
0.3	
0.4	
0.5	
0.6	
0.7	
0.8	
0.9	
1.0	
1.2	
Other grain size and hardness upon request	
Product normative references: VDFI 8001 SAE J441 AMS 2431/8A	

PACKING

Available packing are 25 kg bags or big bags. Pallet weight 1000 kg.

Spajic d.o.o. * Milosevski put bb Negotin * Republic of Serbia
Phone: +381 19 542 630 Fax: +381 19 549 774

SPAJIC d.o.o. CERT IND Organization with Quality Management System Certified ISO 9001 Certificate 9964 C

Najbolje resenje. Die beste Lösung. The best solution.