


Technical data sheet

Corrugated steel fibers

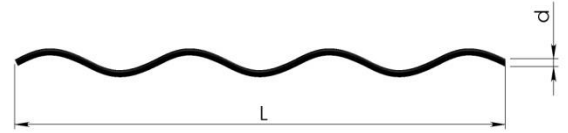

Corrugated steel fibers are filaments of steel wire for reinforcement of concrete and mortar. For manufacturing wire fibers are using wires of different diameters deformed and cut to lengths.

Steel fibers reinforcement is widely used as the main and unique reinforcing for industrial concrete floor slabs, shotcrete, prefabricated concrete products, slabs on piles, tunnel segments, concrete cellars, foundation slabs, and shear reinforcement in prestressed elements.

Steel fibers improve the mechanical properties concrete and materials such as ductility, durability, energy absorption, fatigue, and toughness. This fiber helps to controls plastic shrinkage cracking in concrete; helps reduce or eliminate need for conventional reinforcement.

| Designation | Length (mm) | Diameter (mm) | Aspect ratio L/d | Cross section | Tensile strength of drawn wire |
|---------------|-------------|---------------|------------------|---------------|--------------------------------|
| ZSW/N 0.75x30 | 30 ± 5% | 0.75 ± 5% | 40 | round | 1100-1400 N/mm ² |
| ZSW/N 1.00x40 | 40 ± 5% | 1.00 ± 5% | 40 | round | 1100-1400 N/mm ² |
| ZSW/N 1.00x50 | 50 ± 5% | 1.00 ± 5% | 50 | round | 1100-1400 N/mm ² |
| ZSW/N 1.05x60 | 60 ± 5% | 1.05 ± 5% | 57 | round | 1100-1400 N/mm ² |

**other lengths available per request*

DOSAGE

Recommended dosage of steel fiber is 25 kg per 1m³ of concrete for 0,5 CMOD.

PACKING AND STORAGE

Corrugated steel fibers are available in paper sacks of 20 kg. Pallet weight 2000 kg. Palettes are wrapped in PVC foil. Do not stack pallets on top of each other.

Steel fibers conforming to EN 14889-1:2006, according by **TSG** 1301 – CPR - 0662

*Spajic d.o.o. * Milosevski put bb Negotin * Republic of Serbia*

Phone: +381 19 542 630 Fax: +381 19 549 774

www.spajic.com

info@spajic.com

