


# STEEL FIBERS WITH HOOKED ENDS

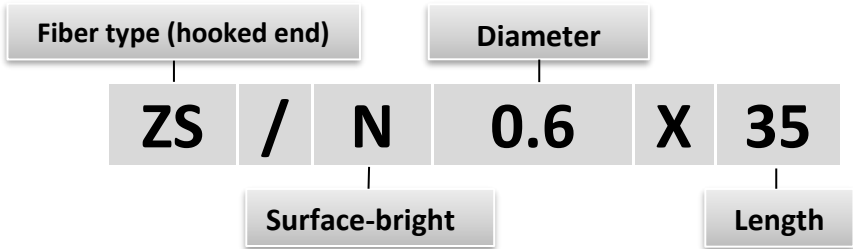

FIBER TYPE	STEEL FIBER WITH HOOKED ENDS
DIAMETER (mm)	0.6 ± 5%
LENGTH (mm)	35 ± 5%
ASPECT RATIO L/d	58
TENSILE STRENGTH OF DRAWN WIRE	1350 N/mm <sup>2</sup>
CROSS SECTION	ROUND


**MIXING**

SPAJIC steel fibers can be added during or after the batching of the concrete but should never be added as the first component. After adding all fibers, mix 1 min/m<sup>3</sup> concrete, not less than 5 minutes at full speed to ensure uniform distribution of the fibers through the concrete.

**DOSAGE**

The fiber dosages may vary depending on the type of application, concrete mix design and performance, and requirements of each particular project.

**PACKING**



1000 kg per pallet  
20 kg per paper bags  
Other pallets weights upon request

<b>DESCRIPTION</b>	SPAJIC steel fibers with hooked ends are produced from cold-drawn steel wire.
<b>ADVENTAGES</b>	<ul style="list-style-type: none"> <li>Provides multi-dimensional reinforcement</li> <li>Improves impact resistance of concrete</li> <li>Enhances durability and toughness of concrete</li> <li>High resistance and good ductility</li> </ul>
<b>APPLICATION</b>	Shotcrete Jointless design Precast reinforcement Floor, tunnel Airport runways Ground supported slabs


## SAFETY AND STORAGE





USE PROTECTION ALL TIME



KEEP DRY DO NOT STACK

**CERTIFICATION** 

**THE BEST CHOICE FOR YOUR CONCRETE**

Spajic D.O.O., Koroglaska 13, 19300 Negotin, Serbia  
[www.spajic.com](http://www.spajic.com), [info@spajic.com](mailto:info@spajic.com)